

Equipment for Brushplating

Powerpack: 15 Volt / 60 Amps with Amperecounter




Ord. No.: 018-000-015-060

Powerpack: 15 Volt / 60 Amps without Amperecounter



Ord. No.: 018-000-015-065

Beakerstand with 6 Beakers:

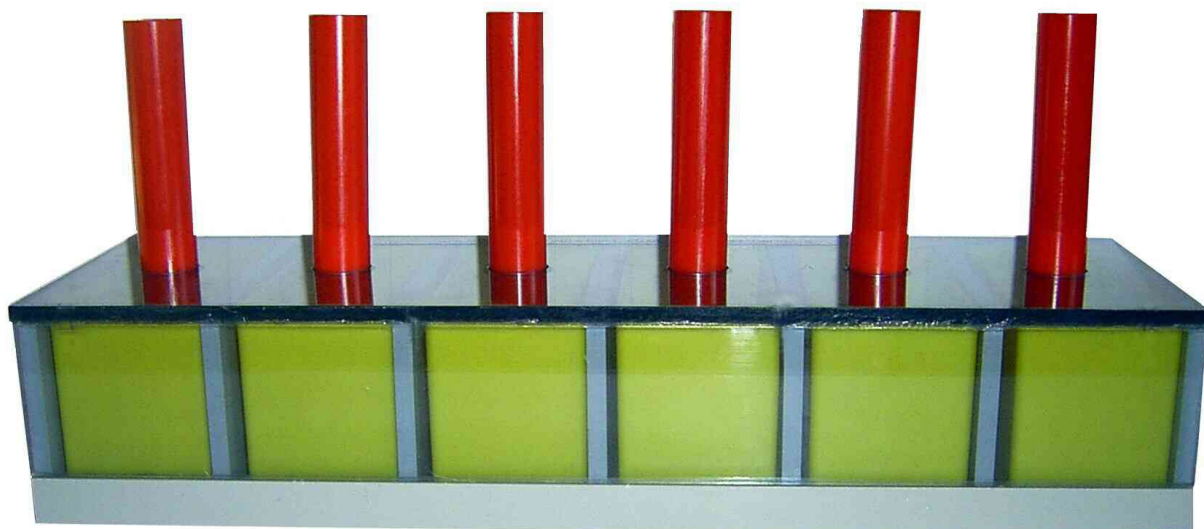

Ord. No.: 092-001-100-040 (without Anodehandle)



Ord. No.: 092-002-010-010 (without Anodehandle)
Every beaker can be closed separately with a cap.

Cabelset 60 Amps



Ord. No.: 065-000-175-060 (set)

Anodehandle




060-000-000-006

Cabelset 32 Amps




Ord. No.: 065-000-175-020 (set)

Flatanodes with different Surrounding

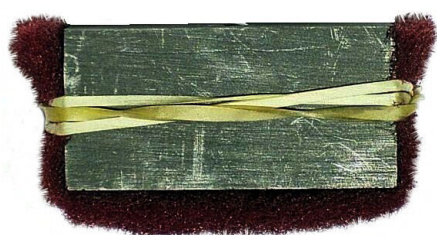

(AK I, Nickel XHB)

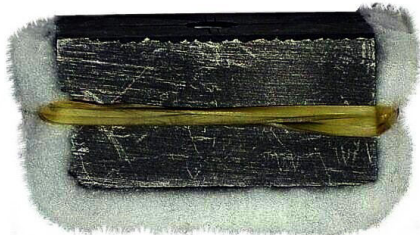

(ER, Aktivator I, II, III, VN sauer)



(Kupfer sauer Elite)

Ord. No.: 030-025-025-050
030-025-025-100

Abm.: 25 x 25 x 50 mm
Abm.: 25 x 25 x 100 mm

Soft Anode sleeve



Ord. No.: 031-000-010-090
Ord. No.: 044-001-010-080P

Abm.: Φ 10 x 90 mm
Abm.: Φ 10 x 80 mm

Anode
Fleece sleeve

Scotchbrite Anode sleeve




Ord. No.: 042-003-010-080H

Abm.: Φ 10 x 80 mm

Scotchbrite sleeve

Copper anode



Ord. No.: 032-000-010-090

Abm.: Φ 10 x 90 mm mit 13 mm Aufnahme

Ord. No.: 044-001-010-080P

Abm.: Φ 10 x 80 mm

Fleece sleeve

Ord. No.: 042-003-010-080H

Abm.: Φ 10 x 80 mm

Scotchbrite fleece



Ord. No.: 030-025-025-050

Abm.: 25 x 25 x 50 mm

Anode

Ord. No.: 044-025-025-050P

Abm.: 25 x 25 x 50 mm

Anoden fleece sleeve

Acid proof rubberband



Ord. No.: 045-040-125-003

Tape for Masking and Sourroundmaterials:



Ord. No.: 050-001-025-033 (25 mm)
050-001-050-033 (50 mm)

Tape



042-002-100-011


Scotchbrite: 11,5cm x 2,5m



043-001-025-100

Fleece: 0,25 x 1m

Plating solution:

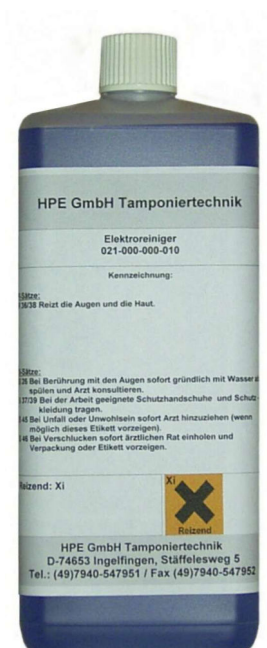


Ord. No.: 021-000-000-020
Elektroreiniger Hell



021-000-001-010
Aktivator I




022-001-001-010
Vornickel sauer

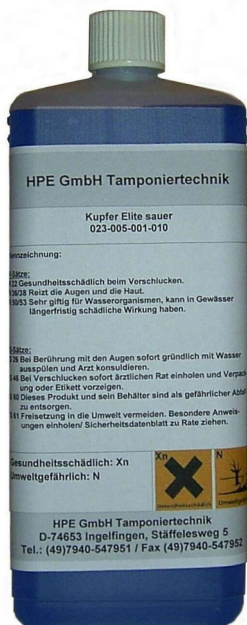

Ord. No.: 023-005-004-010

Kupfer sauer Rapid

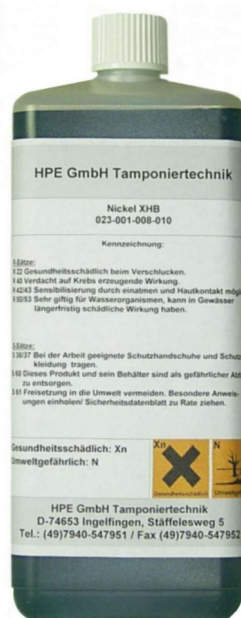

023-002-001-010

Nickel-Cobalt

Tray for cylinder



Tray for the plating solution



090-001-150-200

Ord. No.: 091-001-001-001

Washing bottle



094-001-002-000

Pictures: Pictures may differ, mistakes reserved.